



basic education

Department:
Basic Education
REPUBLIC OF SOUTH AFRICA

**NATIONAL SENIOR
CERTIFICATE**

GRADE 12

MECHANICAL TECHNOLOGY: FITTING AND MACHINING

NOVEMBER 2021

MARKING GUIDELINES

MARKS: 200

These marking guidelines consist of 24 pages.

QUESTION 1: MULTIPLE-CHOICE QUESTIONS (GENERIC)

- | | | |
|-----|---------|------------|
| 1.1 | B ✓ | (1) |
| 1.2 | A ✓ | (1) |
| 1.3 | D ✓ | (1) |
| 1.4 | A / C ✓ | (1) |
| 1.5 | A ✓ | (1) |
| 1.6 | C ✓ | (1) |
| | | [6] |

QUESTION 2: SAFETY (GENERIC)

2.1 First-aid applications to an open wound:

- Use surgical gloves. ✓
- Do not remove anything that is stuck to the wound. ✓
- Never use sticky plaster on the wound. ✓
- Cover the wound with a clean, lint-free cloth. ✓
- Avoid using any oily substances or lotions on wounds. ✓
- If necessary, cool wounds with cold water. ✓
- Apply pressure to prevent blood loss if necessary. ✓
- Avoid contact with blood from patient. ✓
- If the wound is on your arm, raise the arm above your head to stop the bleeding. ✓

(Any 2 x 1) (2)

2.2 Surface grinder: (Already switched on)

- Never leave the grinder unattended. ✓
- Switch off the machine when leaving. ✓
- Don't try to stop revolving emery wheel with your hand. ✓
- Don't adjust the machine while working. ✓
- Don't open any guard while the machine is on. ✓
- Do not force the grinding wheel on to the work piece. ✓
- Approach the work piece slowly and evenly. ✓
- Don't clean the machine while working. ✓
- Do not put hands near the work piece when grinder is in motion. ✓
- Don't clean or adjust the machine while working. ✓
- Check for oil on the floor while working (spilling of cutting fluid on floor while working) ✓
- Check that the grinding wheel is running evenly. ✓

(Any 2 x 1) (2)

2.3 Gauges calibrated:

- To ensure accurate readings. ✓
- To prevent overloading. ✓

(Any 1 x 1) (1)

2.4 Finger protectors' hazards on power driven guillotines:

- The finger protector prevents the hazards of getting the fingers cut by the blades. ✓
- To be crushed by the hold-downs. ✓

(2)

2.5 **Welding or flame cutting operation safety:**

- An operator has been instructed on how to use the equipment safely. ✓
- A workplace is effectively partitioned off. ✓
- An operator uses protective equipment. ✓
- Ensure that all equipment is in safe working condition. ✓
- Ensure that there are no flammable materials around the welding area. ✓
- Weld area must be well ventilated. ✓
- Fire extinguisher must be in close proximity. ✓

(Any 2 x 1) (2)

2.6 **Workshop layout:**

Product layout. ✓

(1)
[10]

QUESTION 3: MATERIALS (GENERIC)

3.1 File test:

- 3.1.1 Difficult ✓ (1)
- 3.1.2 Easy ✓ (1)
- 3.1.3 Difficult ✓ (1)

3.2 Heat treatment:

- A. – Grain growth. ✓
- B. – Recrystallisation. ✓
- C. – Recovery. ✓ (3)

3.3 Bending test:

- Bend the test piece through a specific angle or around a mandrel or bar, ✓ having a defined radius, ✓ until a rupture in the metal occurs. ✓
- Place the material in a vice and bend it ✓ then observe ✓ the ductility of the material. ✓

(Any 1 x 3) (3)

3.4 Purpose of case hardening:

Creates a hard surface ✓ with a tough core. ✓ (2)

3.5 Quenching media:

- Water ✓
- Brine (saltwater) ✓
- Oil ✓
- Soluble oil and water ✓
- Nitrogen air-infused air ✓

(Any 3 x 1) (3)

[14]

QUESTION 4: MULTIPLE-CHOICE QUESTIONS (SPECIFIC)

- | | | |
|------|---------|-------------|
| 4.1 | C ✓ | (1) |
| 4.2 | B ✓ | (1) |
| 4.3 | A ✓ | (1) |
| 4.4 | A ✓ | (1) |
| 4.5 | D ✓ | (1) |
| 4.6 | D ✓ | (1) |
| 4.7 | C ✓ | (1) |
| 4.8 | C ✓ | (1) |
| 4.9 | B / D ✓ | (1) |
| 4.10 | D ✓ | (1) |
| 4.11 | A ✓ | (1) |
| 4.12 | A ✓ | (1) |
| 4.13 | B ✓ | (1) |
| 4.14 | D ✓ | (1) |
| | | [14] |

QUESTION 5: TERMINOLOGY (LATHE AND MILLING MACHINE) (SPECIFIC)

5.1 Advantages of compound slide method:

- Tapers with large angles can be cut. ✓
- External and internal tapers can be cut. ✓
- The set-up is simple. ✓

(Any 2 x 1) (2)

5.2 Taper cutting:

5.2.1 Length of taper:

$$\text{Tan } \frac{\theta}{2} = \frac{D-d}{2 \times l}$$

$$2 \times l = \frac{D-d}{\tan \frac{\theta}{2}} \quad \checkmark$$

$$2l = \frac{92-50}{\tan 4^\circ} \quad \checkmark$$

$$2l = \frac{42}{0,069926811} \quad \checkmark$$

$$l = \frac{600,6279909}{2} \quad \checkmark$$

$$= 300,31 \text{ mm} \quad \checkmark$$

(5)

5.2.2 Tailstock set-over:

$$\text{Set-over} = \frac{L(D-d)}{2l}$$

$$= \frac{425,31(92-50)}{2 \times 300,31} \quad \checkmark$$

$$= 29,74 \text{ mm} \quad \checkmark$$

(3)

5.3 **Key ways:**

5.3.1 **Width:**

$$\text{Width} = \frac{D}{4}$$

$$\text{Width} = \frac{75}{4} \checkmark$$

$$= 18,75 \text{ mm } \checkmark$$

(2)

5.3.2 **Thickness:**

$$\text{Thickness} = \frac{D}{6}$$

$$\text{Thickness} = \frac{75}{6} \checkmark$$

$$= 12,50 \text{ mm } \checkmark$$

(2)

5.3.3 **Length:**

$$\text{Length} = 1,5 \times \text{diameter of shaft}$$

$$= 1,5 \times 75 \checkmark$$

$$= 112,50 \text{ mm } \checkmark$$

(2)

5.4 **Disadvantages of down-cut milling:**

- Vibration in the arbor is unavoidable. ✓
- A fine feed must be used. ✓
- When milling material with hard scale, the cutter teeth come directly in contact with the scale, which can damage the cutter. ✓
- The process is time consuming. ✓

(Any 2 x 1)

(2)

[18]

QUESTION 6: TERMINOLOGY (INDEXING) (SPECIFIC)

6.1 Gear terminology:

6.1.1 Pitch-circle diameter:

$$\begin{aligned} \text{PCD} &= m \times T \\ &= 1,5 \times 200 \checkmark \\ &= 300 \text{ mm} \checkmark \end{aligned}$$

$$\begin{aligned} \text{CP} &= m \times \pi \\ &= 1,5 \times \pi \\ &= 4,71 \text{ mm} \checkmark \end{aligned}$$

OR

$$\begin{aligned} \text{PCD} &= \frac{\text{CP} \times T}{\pi} \\ &= \frac{4,71 \times 200}{\pi} \\ &= 299,85 \text{ mm} \checkmark \end{aligned} \tag{2}$$

6.1.2 Dedendum:

$$\begin{aligned} \text{Dedendum} &= 1,157 \times m \\ &= 1,157 \times 1,5 \checkmark \\ &= 1,74 \text{ mm} \checkmark \end{aligned}$$

$$\begin{aligned} \text{Dedendum} &= 1,25 \times m \\ &= 1,25 \times 1,5 \checkmark \\ &= 1,88 \text{ mm} \checkmark \end{aligned} \tag{2}$$

6.1.3 Outside diameter:

$$\begin{aligned} \text{OD} &= \text{PCD} + 2 \times m \\ &= 300 + 2(1,5) \checkmark \\ &= 303 \text{ mm} \checkmark \end{aligned}$$

$$\begin{aligned} \text{OD} &= m(T + 2) \\ &= 1,5(200 + 2) \checkmark \\ &= 303 \text{ mm} \checkmark \end{aligned} \tag{2}$$

6.1.4 Working depth:

$$\begin{aligned} \text{WD} &= 2 \times m \\ &= 2 \times 1,5 \checkmark \\ &= 3 \text{ mm} \checkmark \end{aligned}$$

$$\begin{aligned} \text{WD} &= 2 \times a \\ &= 2 \times 1,5 \checkmark \\ &= 3 \text{ mm} \checkmark \end{aligned} \tag{2}$$

6.2 **Dovetails:**

$$W = 210 + 2(DE)$$
$$m = W - 2(AC) - 2(R)$$

6.2.1 **Maximum width distance of dove tail: (W)**

Calculate DE or y:

$$\tan\theta = \frac{DE}{AD}$$
$$DE = \tan\theta \times AD \quad \checkmark$$
$$= \tan 30^\circ \times 45 \quad \checkmark$$
$$= 25,98 \text{ mm} \quad \checkmark$$

$$W = 210 + 2(DE) \quad \checkmark$$
$$= 210 + 2(25,98) \quad \checkmark$$
$$= 210 + 51,96$$
$$= 261,96 \text{ mm} \quad \checkmark$$

(6)

6.2.2 **Distance between the rollers: (m)**

Calculate AC or x:

$$\tan\theta = \frac{BC}{AC}$$
$$AC = \frac{BC}{\tan\theta} \quad \checkmark$$
$$AC = \frac{17}{\tan 30^\circ} \quad \checkmark$$
$$= 29,44 \text{ mm} \quad \checkmark$$

$$m = W - 2(AC) - 2(R) \quad \checkmark$$
$$= 261,96 - 2(29,44) - 2(17) \quad \checkmark$$
$$= 261,96 - 58,88 - 34$$
$$= 169,08 \text{ mm} \quad \checkmark$$

(6)

6.3 **Milling of spur gear:**

6.3.1 **Indexing:**

$$\text{Indexing} = \frac{40}{N} = \frac{40}{137}$$

$$= \frac{40}{A} = \frac{40}{140} \quad \checkmark$$

$$= \frac{4}{14} \times \frac{2}{2}$$

$$= \frac{8}{28} \quad \checkmark$$

Indexing: 8 holes on a 28 - hole circle \checkmark

OR

12 holes on a 42 - hole circle \checkmark

OR

14 holes on a 49-hole circle. \checkmark

(3)

6.3.2 **Change gears: (Markers to note alternative answers and calculations to award full marks if the answer is correct)**

$$\frac{D_r}{D_n} = (A - n) \times \frac{40}{A}$$

$$\frac{D_r}{D_n} = (140 - 137) \times \frac{40}{140} \quad \checkmark$$

$$= 3 \times \frac{40}{140}$$

$$= \frac{120}{140} \quad \checkmark$$

$$= \frac{12}{14}$$

$$= \frac{12}{14} \times \frac{2}{2} \quad \checkmark$$

$$\frac{D_r}{D_n} = \frac{24}{28} \quad \checkmark \quad \text{OR} \quad \frac{48}{56} \quad \checkmark$$

(5)
[28]

QUESTION 7: TOOLS AND EQUIPMENT (SPECIFIC)

- 7.1 **Functions of a moment and force tester:**
- To determine the reaction on either side of a simple loaded beam. ✓
 - To illustrate the concept of the triangle of force. ✓
- (2)
- 7.2 **TWO hardness testers:**
- Brinell ✓
 - Rockwell ✓
 - Vickers ✓
- (Any 2 x 1) (2)
- 7.3 **Precision measuring instrument:**
- Depth micrometer ✓
 - Vernier caliper ✓
- (Any 1 x 1) (1)
- 7.4 **Identify tester:**
Tensile tester ✓
- (1)
- 7.5 **There are THREE ways that hardness is measured:**
- Resistance to penetration. ✓
 - Elastic hardness. ✓
 - Resistance to abrasion / scratching / file test.
 - Sound test (dropping it on the floor and listen to the sound). ✓
- (Any 3 x 1) (3)
- 7.6 **Screw thread height:**
- $$H = 0,866 \times P$$
- $$= 0,866 \times 2 \quad \checkmark$$
- $$= 1,73 \text{ mm} \quad \checkmark$$
- (2)
- 7.7 **Measuring instrument:**
Vernier caliper ✓
- (1)
- 7.8 **Interchangeable extension:**
To measure depths greater than 25 mm. ✓
- (1)

[13]

QUESTION 8: FORCES (SPECIFIC)

8.1 Calculate resultant:

VERTICAL COMPONENT:

$$\sum VC = -45\sin 90^\circ - 70\sin 30^\circ + 185\sin 45^\circ$$

$$\sum VC = -45 - 35 + 130,82$$

$$\sum VC = 50,82\text{N}$$

HORIZONTAL COMPONENT:

$$\sum HC = 120\cos 0^\circ - 70\cos 30^\circ - 185\cos 45^\circ$$

$$\sum HC = 120 - 60,62 - 130,82$$

$$\sum HC = -71,44\text{N}$$

OR

VC/y = F sine		HC/x = F cosine	
-45sin90° OR 45sin270°	-45 N ✓	120cos0°	120 N ✓
-70sin30° OR 70sin210°	-35 N ✓	-70cos30° OR 70cos210°	-60,62 N ✓
185sin45° OR 185sin135°	130,82 N ✓	-185cos45° OR 185cos135°	-130,82 N ✓
Y =	50,82 N ✓	X =	-71,44 N ✓

$$R^2 = VC^2 + HC^2$$

$$\sqrt{R^2} = \sqrt{(50,82)^2 + (-71,44)^2}$$

$$\sqrt{R^2} = \sqrt{7686,37}$$

$$R = 87,67\text{ N}$$

$$R = 87,67\text{N } 35,43^\circ \text{ N of W}$$

OR


$$R = 87,67\text{N } 54,57^\circ \text{ W of N}$$

$$\tan \theta = \frac{VC}{HC}$$

$$\theta = \tan^{-1}\left(\frac{50,82}{71,44}\right)$$


$$\theta = \tan^{-1}(0,711)$$

$$\theta = 35,43^\circ$$

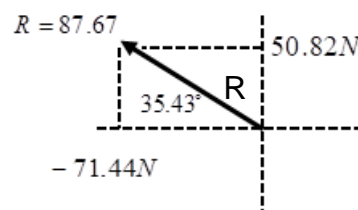

(15)

8.2 **Moments:**

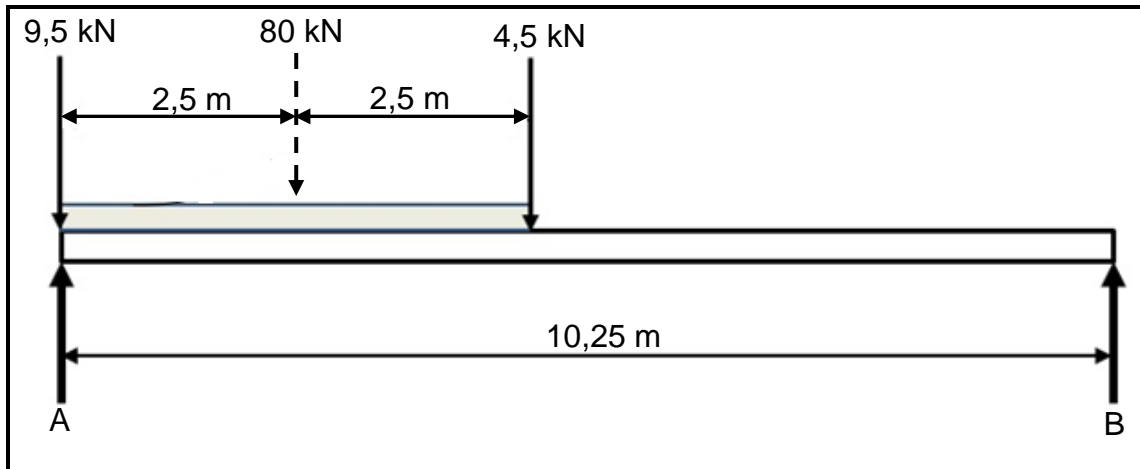

8.2.1 **Point load for UDL:**

$$16\text{kN/m} \times 5\text{m} \quad \checkmark$$
$$80\text{kN} \quad \checkmark$$

(2)

8.2.2 **Take moments about B:**

$$A \times 10,25 = (4,5 \times 5,25) + (80 \times 7,75) + (9,5 \times 10,25) \quad \checkmark$$

$$10,25A = 23,625 + 620 + 97,375$$

$$A = \frac{741}{10,25} \quad \checkmark$$

$$A = 72,29 \text{ kN} \quad \checkmark$$

(3)

8.2.3 **Take moments about A:**

$$B \times 10,25 = (9,5 \times 0) + (80 \times 2,5) + (4,5 \times 5) \quad \checkmark$$

$$10,25B = 0 + 200 + 22,5$$

$$B = \frac{222,5}{10,25} \quad \checkmark$$

$$B = 21,71 \text{ kN} \quad \checkmark$$

(3)

8.3.1 The stress in the material in MPa:

$$\sigma = \frac{F}{A}$$

$$\sigma = \frac{90 \times 10^3}{6,17 \times 10^{-3}} \checkmark$$

$$\sigma = 14586709,89 \text{ Pa}$$

$$\sigma = 14,59 \text{ MPa} \checkmark$$

(2)

8.3.2 The diameter of the mild steel shaft:

$$\sigma = \frac{F}{A}$$

$$A = \frac{F}{\sigma} \checkmark$$

$$\frac{\pi d^2}{4} = \frac{90 \times 10^3}{14,59 \times 10^6} \checkmark$$

$$\pi d^2 = \frac{90 \times 10^3 \times 4}{14,59 \times 10^6}$$

$$\pi d^2 = 0,0247$$

$$\sqrt{d^2} = \sqrt{\frac{0,0247}{\pi}}$$

$$d = \sqrt{7,85 \times 10^{-3}} \checkmark$$

$$d = 0,08863 \text{ m} \checkmark$$

$$d = 88,63 \text{ mm} \checkmark$$

$$A = \frac{\pi d^2}{4}$$

$$A \times 4 = \pi d^2$$

$$d^2 = \frac{A \times 4}{\pi} \checkmark$$

$$d = \sqrt{\frac{A \times 4}{\pi}}$$

$$d = \sqrt{\frac{(6,17 \times 10^{-3}) \times 4}{\pi}} \checkmark$$

$$d = \sqrt{0,007855887} \checkmark$$

$$d = 0,088633441 \text{ m} \checkmark$$

$$d = 88,63 \text{ mm} \checkmark$$

OR

(5)

8.3.3 **Original length:**

$$\varepsilon = \frac{\Delta L}{OL}$$

$$OL = \frac{\Delta L}{\varepsilon} \checkmark$$

$$OL = \frac{0,012}{1,64 \times 10^{-3}} \checkmark$$

$$OL = 7,32 \text{ mm} \checkmark$$

(3)
[33]

QUESTION 9: MAINTENANCE (SPECIFIC)

9.1 Preventative maintenance:

- Planned or scheduled maintenance. ✓
- Condition-based maintenance. ✓

(2)

9.2 Preventative maintenance of gear drive systems:

- Checking and replenishment of lubrication levels. ✓
- Ensuring that gears are properly secured to shafts. ✓
- Cleaning and replacement oil filters. ✓
- Reporting excessive noise, wear, vibration and overheating for expert attention. ✓

(Any 3 x 1)

(3)

9.3 Purpose of jockey pulley:

- The jockey pulley helps setting the tension on the system. ✓
- To increase the angle of contact in an open belt drive. ✓

(Any 1 x 1)

(1)

9.4 Properties of materials:

9.4.1 Teflon:

- Water resistant. ✓
- Resistant to grease. ✓
- Resistant to heat. ✓
- Resistant to corrosion. ✓
- Can withstand high temperatures. ✓
- Need no lubricants. ✓
- Electrical insulator ✓
- Thermoplastic /Easy to be reshaped / recycled. ✓

(Any 2 x 1)

(2)

9.4.2 Nylon:

- Tough. ✓
- Hard-wearing. ✓
- Cheap. ✓
- Needs no or little maintenance. ✓
- Can withstand high temperatures. ✓
- Need no or little lubricants. ✓
- Is light. ✓
- Can absorb shock. ✓
- Resistant to chemicals. ✓
- Non-toxic. ✓
- Thermoplastic /Easy to be reshaped. ✓
- Has high load-bearing strength ✓

(Any 2 x 1)

(2)

9.4.3 **Vesconite:**

- Wear resistant. ✓
- Low friction. ✓
- Operate with little or no lubrication. ✓
- Easy to machine. ✓
- Load carry higher than white metal. ✓
- Cost effective material. ✓
- Gives long life span. ✓
- Performs well, in unhygienic, dirty and un-lubricated environments. ✓
- Low maintenance. ✓
- Low or no water absorption ✓
- High chemical resistance ✓
- Versatile ✓
- Can handle high temperatures ✓
- Thermoplastic /Easy to be reshaped ✓

(Any 2 x 1) (2)

9.5 **Use of material:**

9.5.1 **Polyvinyl chloride (PVC):** (*Due to the large number of alternatives, marker discretion must be used - discuss with IM*).

- Electrical cable isolation. ✓
- Electrical pipes. ✓
- Water pipes. ✓
- Artificial leather. ✓
- Cling wrap. ✓
- Credit / bank / phone cards. ✓
- Window frames. ✓
- Fences. ✓
- Furniture. ✓

(Any 1 x 1) (1)

9.5.2 **Glass fibre:** (*Due to the large number of alternatives, marker discretion must be used - discuss with IM*).

- Boats. ✓
- Motor vehicles bodies. ✓
- Transparent roof sheeting. ✓
- Petrol tanks. ✓
- Swimming pools. ✓
- Furniture. ✓
- Fruit and salad bowls. ✓
- Ornaments. ✓
- Fishing equipment. ✓

(Any 1 x 1) (1)

9.6 **Difference between thermoplastic and thermo-hardened composites:**

Thermoplastic can be re-heated ✓ and reshaped again ✓ where a thermo-hardened plastic cannot be re-heated, ✓ to be softened, shaped ✓ and moulded again.

(4)
[18]

QUESTION 10: JOINING METHODS (SPECIFIC)

10.1 **Screw thread:**

- Square thread ✓
- Acme thread ✓
- V-screw thread ✓
- Trapezium thread / Buttress thread ✓

(Any 3 x 1) (3)

10.2 **Square Thread:**

10.2.1 **Pitch diameter:**

$$\begin{aligned} \text{Pitch} &= \frac{\text{Lead}}{\text{Number of starts}} \\ &= \frac{36}{2} \quad \checkmark \\ &= 18 \text{ mm} \quad \checkmark \end{aligned}$$

$$\begin{aligned} \text{PD} &= \text{OD} - \frac{P}{2} \\ &= 80 - \frac{18}{2} \quad \checkmark \\ &= 71 \text{ mm} \quad \checkmark \end{aligned}$$

(4)

10.2.2 **Helix angle of the thread:**

$$\begin{aligned} \tan \theta &= \frac{\text{Lead}}{\pi \times \text{PD}} \\ \tan \theta &= \frac{36}{\pi \times 71} \quad \checkmark \\ \theta &= \tan^{-1}(0,161396562) \quad \checkmark \\ &= 9,17^\circ \quad \checkmark \end{aligned}$$

(4)

10.2.3 **Leading angle:**

$$\begin{aligned} \text{Leading angle} &= 90^\circ - (\text{helix angle} + \text{clearance angle}) \\ &= 90^\circ - (9,17^\circ + 3^\circ) \quad \checkmark \\ &= 77,83^\circ \quad \checkmark \end{aligned}$$

(2)

10.2.4 **Following angle:**

$$\begin{aligned} \text{Following angle} &= 90^\circ + (\text{helix angle} - \text{clearance}) \\ &= 90^\circ + (9,17^\circ - 3^\circ) \quad \checkmark \\ &= 96,17^\circ \quad \checkmark \end{aligned}$$

(2)

10.3 **Multiple screw threads:**

- They provide more bearing surface than single start screw thread / does not strip easily. ✓
- To provide faster linear movement. ✓
- They are more efficient as they lose less power to friction compared to single start screw threads. ✓

(3)
[18]

QUESTION 11: SYSTEMS AND CONTROL (DRIVE SYSTEMS) (SPECIFIC)

11.1 Hydraulics:

11.1.1 The fluid pressure:

$$P = \frac{F}{A}$$

$$P = \frac{25 \times 10^3}{9,62 \times 10^{-4}} \checkmark$$

$$P = 25984480,5 \text{ Pa}$$

$$P = 25,98 \text{ MPa} \checkmark$$

$$A (\text{Plunger}) = \frac{\pi d^2}{4}$$

$$A = \frac{\pi (0,035)^2}{4} \checkmark$$

$$A = 9,62 \times 10^{-4} \text{ m}^2 \checkmark$$

(4)

11.1.2 Force at ram:

$$\frac{F}{A} = \frac{f}{a}$$

$$F = \frac{f \times A}{a} \checkmark$$

$$F = \frac{(25 \times 10^3) \times (11,31 \times 10^{-3})}{9,62 \times 10^{-4}} \checkmark$$

$$F = 293918,92 \text{ N} \checkmark$$

OR

$$F = 293,92 \text{ kN} \checkmark$$

OR

$$\frac{F}{D^2} = \frac{f}{d^2}$$

$$\frac{F}{120^2} = \frac{25}{35^2} \checkmark$$

$$F = \frac{25 \times 120^2}{35^2} \checkmark$$

$$F = 293,88 \text{ kN} \checkmark$$

(5)

11.2 **Functions hydraulic reservoir:**

- A fluid storage tank. ✓
- Promotes air separation from the fluid. ✓
- Support for the pump and electric motor. ✓
- Promotes heat dispersion. ✓
- Acts as a base plate for mounting control equipment.
- Permits contaminants to settle at the bottom in order to be drained. ✓

(Any 1 x 1) (1)

11.3 **Efficiency of pneumatic systems:**

- Pneumatic tools are environmentally friendly. ✓
- Last long. ✓
- It is robust (powerful / less force required) ✓
- Easy to use. ✓
- It is compact. ✓
- Easy to maintain as there are so few working parts. ✓

(Any 2 x 1) (2)

11.4 **Applications for pneumatic systems: (Due to the large number of alternatives, marker discretion must be used - discuss with IM).**

- Drills. ✓
- Brake systems. ✓
- Jackhammers ✓
- Nail guns ✓
- Missiles ✓
- Doors ✓
- Spray guns ✓
- Air blow guns ✓
- Air socket wrench ✓
- Grinders ✓

(Any 2 x 1) (2)

11.5 **Belt drives:**

11.5.1 **Rotation frequency:**

$$N_1 \times D_1 = N_2 \times D_2 \quad \checkmark$$

$$N_2 = \frac{N_1 \times D_1}{D_2} \quad \checkmark$$

$$N_2 = \frac{7,2 \times 0,6}{0,8}$$

$$N_2 = 5,4 \text{ r/sec} \quad \checkmark$$

(3)

11.5.2 **Power transmitted:**

$$\text{Ratio} = \frac{T_1}{T_2} \qquad P = \frac{(T_1 - T_2)\pi DN}{60}$$

$$T_2 = \frac{T_1}{\text{Ratio}} \checkmark \qquad P = (300 - 120)\pi \times 0,8 \times 5,4 \checkmark$$

$$T_2 = \frac{300}{2,5} \qquad P = 2442,90 \text{ Watt}$$

$$T_2 = 120 \text{ N} \checkmark \qquad P = 2,44 \text{ kW} \checkmark \qquad (4)$$

11.6 **Gear drives:**

11.6.1 **Rotation frequency:**

$$\frac{N_{\text{input}}}{N_{\text{output}}} = \frac{\text{Product of teeth on driven gears}}{\text{Product of teeth on driver gears}}$$

$$N_{\text{D)OUTPUT}} = \frac{T_A \times T_C \times N_A}{T_B \times T_D} \checkmark$$

$$N_{\text{D)OUTPUT}} = \frac{30 \times 20 \times 2300}{40 \times 60} \checkmark$$

$$N_{\text{D)OUTPUT}} = 575 \text{ r/min} \checkmark \qquad (4)$$

11.6.2 **Gear ratio:**

$$\text{Gear ratio} = \frac{\text{Product of teeth on driven gears}}{\text{Product of teeth on driver gears}}$$

$$\text{Gear ratio} = \frac{40 \times 60}{30 \times 20} \quad \checkmark$$

$$\text{Gear ratio} = 4 : 1 \quad \checkmark$$

OR

$$\text{Speed ratio} = \frac{N_A}{N_D}$$

$$= \frac{2300}{575} \quad \checkmark$$

$$= 4:1 \quad \checkmark$$

(3)
[28]

TOTAL: 200